




### ● 2 Heights

0.8m - LSTEL80

1.0m - LSTEL100

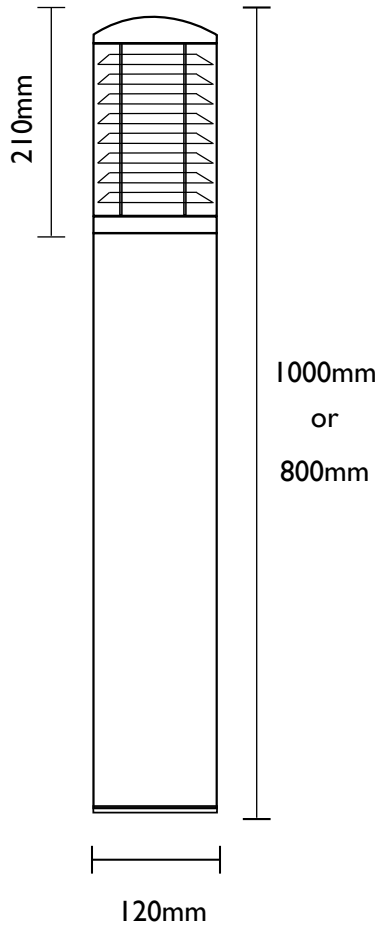

## SPECIFICATIONS & INFORMATION

### ● BOLLARD

- Materials: Marine Grade (316) Stainless Steel • Voltage: 240v • IP Rating: IP65
- Bulb Holder: ES / E27 • Max Wattage: 70w • Two Heights: 0.8m or 1.0m
- Wall Thickness of 3mm • Internal Surface Mount (Standard)
- Full Photometric Data available

### ● Professional Tubular Root Mounts Available - Approx. 40cm longer than standard

- Anchor Bar • Pin Hex Security Screws

### ● LED CORN BULB

- Voltage: 240v • ES / E27 • Wattage: 20w • <30,000 hours
- Colour Temp: 6500K (Daylight White) / 3000K (Warm White)
- Lumen Output: 2100 (Daylight) / 1600 lumens (Warm)
- Lamp Type: LED (Epistar 2835) • Number of LEDs: 135
- 2 Year Guarantee



### ● PHOTOCELL

- Voltage: 240v
- Switch On / Off at 30 / 80 Lux
- 1500VA or 5A Inductive load at 6MFD
- Double Insulated (Do not connect to earth)
- 20mm Diameter

